

# Central Office Connector Block Accessories



Model A0344522 A0310190 A0408552 A0321718 A0337661 A0386865  
A0388387 A0359994 A0388388 A0388389


| NAME  | ORDER NUMBER |
|---|--------------|
| 303-1213 Test Cord                              | A0344522     |
| 303-1019 Test Point Insulator (except C(G)-391) | A0310190     |
| Test Point Insulator C(G)- 391 only             | A0408552     |
| 545-1137 Wire-wrap Terminal Cap                 | A0321718     |
| 377-1003 Mounting Bracket                       | A0337661     |
| C-303 Mounting Bar                              | A0386865     |
| 7 ft Universal Connector Mounting Bar           | A0388387     |
| 8 ft Universal Connector Mounting Bar           | A0359994     |
| 9 ft Universal Connector Mounting Bar           | A0388388     |
| 11.5 ft Universal Connector Mounting Bar        | A0388389     |

Test cords

Circuit Markers

Mounting Bars and Brackets

Universal Connector Mounting Bars

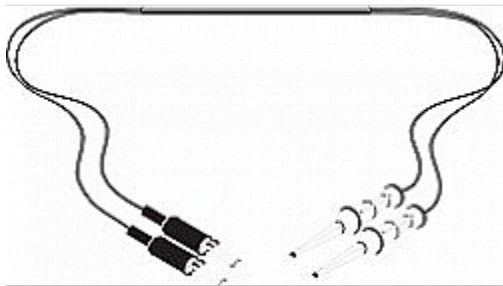


## BENEFITS

- Convenient test access
- Rapid fault diagnosis
- Industry standard connectors
- Rugged, long-lasting materials

## Test Cords

### 303-1213

This test cord is equipped with mini-test clips on one end and two insulated alligator clips on the other end.

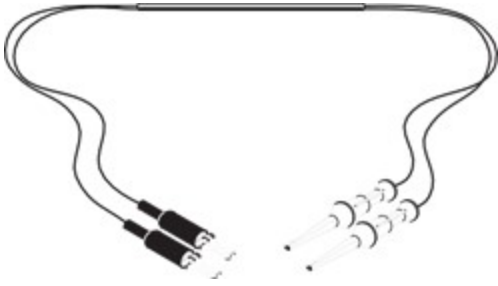

### Specifications / How to Order

| Product Code | Part Number     | Description | Length<br>m<br>(ft) | Conductors | Termination                    | Standard Pack | Size<br>mm<br>(in.)                        | Weight<br>kg<br>(lb) |
|--------------|-----------------|-------------|---------------------|------------|--------------------------------|---------------|--|----------------------|
| 303-1213     | <b>A0344522</b> | Test Cord   | 0.53<br>(1.75)      | 2          | Mini clips/two alligator clips | 1             | 25<br>x<br>25<br>x 51<br>(1 x<br>1 x<br>2) | 0.03<br>(0.06)       |


Note: Order by **Part Number**

### Circuit Markers

Comtest circuit markers are used to indicate Special Safeguarding Measures/Special Service Protection (SSM/SSP) circuits on the 303-family of connectors.

#### 303-1019


The test point insulator button fits into the recesses on the test field to isolate the pairs from accidental contact by test points or during testing with a front tap shoe. The buttons are made of a red plastic material and are designed to snap into place to cover one test field contact. Not compatible with C(G)-391



#### Test-point insulator button for C(G)-391 only (not shown).

#### 545-1137

The red-colored plastic cap is used to mark and prevent accidental access to wire-wrap terminals of special circuits. The cap is designed to fit snugly over a wire-wrap terminal. One is required for each terminal



**Specifications / How to Order**

| <b>Product Code</b> | <b>Part Number</b> | <b>Description</b>                     | <b>Standard Pack</b> | <b>Size mm (in.)</b>          | <b>Weight kg (lb)</b> |
|---------------------|--------------------|--|----------------------|-------------------------------|-----------------------|
| 303-1019            | A0310190           | Test Point Insulator (except C(G)-391) | 100                  | 25 x 80<br>130<br>(1 x 3 x 5) | 0.03<br>(0.06)        |
| A0408552            | A0408552           | Test Point Insulator C(G)-391 only     | 100                  | 25 x 80<br>130<br>(1 x 3 x 5) | 0.03<br>(0.06)        |
| 545-1137            | A0321718           | Wire-wrap Terminal Cap                 | 100                  | 25 x 80<br>130<br>(1 x 3 x 5) | 0.03<br>(0.06)        |


Note: Order by **Part Number**

**Mounting Bars and Brackets**

CNI provides mounting bars and brackets for various connector types and applications made of heavy gauge steel.

**377-1003**

Bracket for wall-mounting a single C-377, C-388 or C(G)-390 connector block.

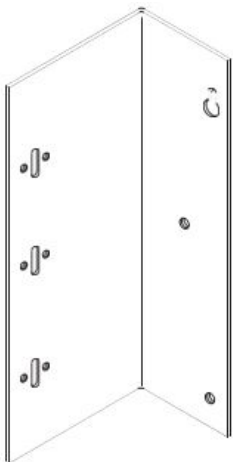

## Specifications / How to Order

| Product Code | Part Number | Description      | Standard Pack | Size mm (in.)                     | Weight kg (lb) |
|--------------|-------------|------------------|---------------|-----------------------------------|----------------|
| 377-1003     | A0337661    | Mounting Bracket | 1             | 260 x 100 x 80<br>(10.38 x 4 x 3) | 1.90<br>(4.25) |

Note: Order by **Part Number**

### C(G)-303 and C(G)-310 Connector Blocks

Mounting bars are available for 7-, 8-, 9- and 11.5-ft high frames. Select the proper mounting bar by connector type and frame height.

#### How to Order - Mounting Bars for C(G)-303 and C(G)-310 Connector Blocks

| Product Code | Part Number     | Connector Type | MDF Height m (ft.) | Length m (in.) | Connector Capacity | Standard Pack |
|--------------|-----------------|----------------|--------------------|----------------|--------------------|---------------|
| 022-1078-115 | <b>A0386865</b> | C-303          | 2.13<br>(7)        | 1651<br>(65)   | 3                  | 1             |

Note: Order by **Part Number**

### Universal Connector Mounting Bars

Comtest Universal Adapter Bars accommodate the compact spacing dimensions of the C(G)-391, C(G)-390, C-388 and C-377 connectors. They are normally used by mounting them on the ends of the transverse arms of the distributing frame at 8 inch centers. They may also be mounted on existing verticals using the slots provided. All the bars are made of 3.4 mm (0.135 in.) thick x 38 mm (1.5 in.) wide plated steel. The mounting bar provides electrical conduction when the distributing frame is used to provide a ground path for the connectors.



#### How to Order

| Product Code | Part Number | MDF Height m (ft.) | Overall Length mm (in.) | Connector Capacity 377/388/390 | Connector Capacity 391 | Standard Pack |
|--------------|-------------|--------------------|-------------------------|--------------------------------|------------------------|---------------|
| 022-3917-115 | A0388387    | 2.13<br>(7)        | 1676<br>(66.60)         | 6                              | 7                      | 1             |

| <b>Product Code</b> | <b>Part Number</b> | <b>MDF Height m (ft.)</b> | <b>Overall Length mm (in.)</b> | <b>Connector Capacity 377/388/390</b> | <b>Connector Capacity 391</b> | <b>Standard Pack</b> |
|---------------------|--------------------|---------------------------|--------------------------------|---------------------------------------|-------------------------------|----------------------|
| 022-3918-115        | A0359994           | 2.44 (8)                  | 1956 (77.00)                   | 7                                     | 8                             | 1                    |
| 022-3919-115        | A0388388           | 2.74 (9)                  | 2362 (93.00)                   | 8                                     | 10                            | 1                    |
| 022-3920-115        | A0388389           | 3.51 (11.5)               | 3114 (122.60)                  | 11                                    | 12                            | 1                    |

Note: Order by **Part Number**