


# 25-Pair IDC Block

Model MRB-25-XXX-T01-XXX-XXXXX



NAME	ORDER NUMBER
25-Pair IDC Block	MRB-25-XXX-T01-XXX-XXXXX

The modular 25-pair untailed or tailed blocks can be stacked vertically or horizontally, enabling assembly of cross-connect fields with any required pair counts. Optional fanning strips can be clipped to the blocks to create wire-guide borders for trouble-free routing and management of jumper wires. Customized blocks are available potted and tailed to length.

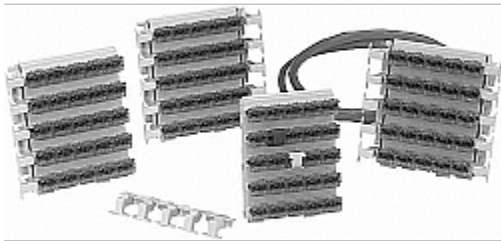

## BENEFITS

- Insulation Displacement Connector (IDC) eliminate the need to strip wires, resulting in faster on-site connections
- Transparent wire receivers allow visual confirmation of proper wire insertion and IDC contact before a connection is made
- Tool-less operation: finger-operated receivers and audible latch-down action eliminate problems of breakage through improper use of tools
- High Viscosity Compound (HVC) environmental encapsulation eliminates corrosion, enabling IDCs to function in high-humidity environments
- "Quiet Front" design and easy test access eliminate the need for disconnection during circuit testing


## SPECIFICATIONS

<b>DIMENSIONS (H X W X D)</b>	4.2 x 4.4 x 1.2" 106.7 x 111.76 x 30.4 mm
<b>INTERFACE</b>	IDCs will accommodate most wire designs with conductor sizes between 26 AWG - 22 AWG (0.4mm - 0.63mm)
<b>COMPLIANCE</b>	Telcordia TR-NWT-001195, TR-TSY-000975, TR-NWT-000937, CAT5 Rating, UL Listed

## Ordering Information

### EASY STEPS:

- 1) Select Pair Count
- 2) Select Material
- 3) Indicate Stub Type
- 4) Select Accessories
- 5) Select Stub Length
- 6) Cable Category

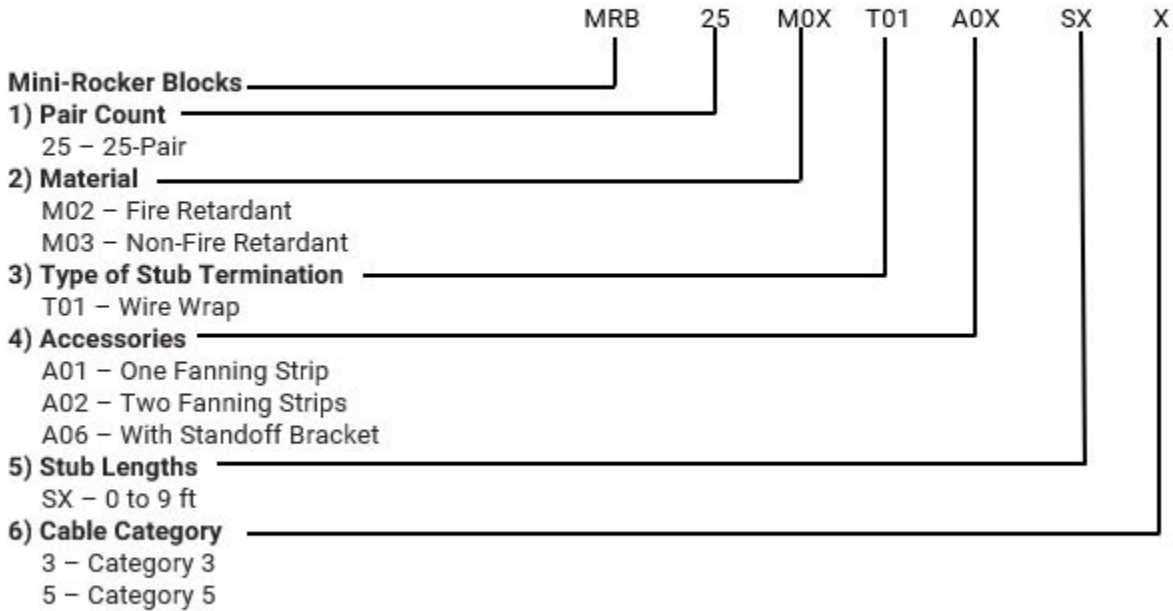

### Example: MRB25M02T01A01S53

25-Pair IDC Block, Fire Retardant, One Fanning Strip, Tailed with One 25-Pair Stub, 5ft (1524mm), Category 3