4/5/8-Pair IDC Distribution Terminal Block with Tail

Model MRB04M02T03F63 MRB04M03T03R15 MRB05M03T01S43
MRB08M02T03F63 MRB08M03T03T43

NAME	ORDER NUMBER
4-Pair IDC Distribution Terminal c/w 6ft Male RJ21 Connectorized Tail	MRB04M02T03F63
4-Pair IDC Distribution Terminal c/w Dual 15" RJ14 Connectorized Tails	MRB04M03T03R15
5-Pair IDC Distribution Terminal c/w 4ft Stub Unterminated	MRB05M03T01S43
8-Pair IDC Distribution Terminal c/w 6ft Male RJ21 Connectorized Tail	MRB08M02T03F63
8-Pair IDC Distribution Terminal c/w 4ft Female RJ21 Connectorized Tail	MRB08M03T03T43

The 4/5/8-Pair IDC Distribution Terminal Blocks with tail provides a dependable, long-term means of discrete connections for small pair counts. The "quiet front" design eliminates incidental shorts and the High Viscosity Compound (HVC) encapsulation blocks moisture and eliminates corrosion, resulting in trouble-free service.

When using a small pair count drop in a ready access configuration, the IDC Distribution Terminal Blocks provide quick pair-at-a-time connections without requiring the use of tools. The IDCs stay latched when connections are made, ensuring wire retention and pullout resistance during jumper wire tracing.

The 4/5/8-Pair IDC Blocks can be utilized for indoor and outdoor applications such as aerial, pedestal, wall mount and marina installations

BENEFITS

- High Viscosity Compound (HVC) environmental encapsulation eliminates corrosion, enabling IDCs to function in high-humidity environments
- Insulation Displacement Connectors - IDC create a water tight, tool-less connection
- "Quiet Front" design and easy test access eliminate the need for disconnection during circuit testing

SPECIFICATIONS

DIMENSIONS (H X W X D)	5-Pair	3.5 x 1.0 x 1.0 "
		88.9 x 25.4 x 25.4 mm

COMTEST NETWORKS INC.
+1-877-369-5499
info@comtestnetworks.com

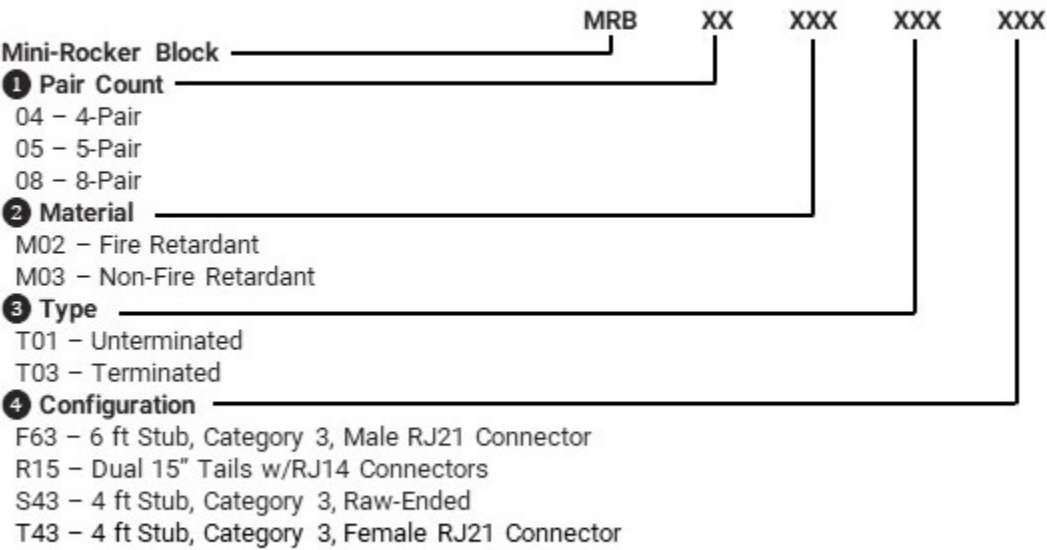| INTERFACE	IDCs will accommodate most wire designs with conductor sizes between 26 AWG - 22 AWG (0.4mm - 0.63mm)
COMPLIANCE	Telcordia TR-NWT-001195, TR-TSY-000975, TR-NWT-000937, CAT5 Rating, UL Listed

Ordering Information

EASY STEPS:
1 Select Pair Count   3 Indicate Type
2 Select Material   4 Select Configuration

```
                                    MRB    XX    XXX    XXX    XXX
Mini-Rocker Block ─────────────────────┘     │      │      │      │
1 Pair Count ───────────────────────────────┘      │      │      │
    04 – 4-Pair                                     │      │      │
    05 – 5-Pair                                     │      │      │
    08 – 8-Pair                                     │      │      │
2 Material ─────────────────────────────────────────┘      │      │
    M02 – Fire Retardant                                    │      │
    M03 – Non-Fire Retardant                                │      │
3 Type ─────────────────────────────────────────────────────┘      │
    T01 – Unterminated                                             │
    T03 – Terminated                                               │
4 Configuration ────────────────────────────────────────────────────┘
    F63 – 6 ft Stub, Category 3, Male RJ21 Connector
    R15 – Dual 15" Tails w/RJ14 Connectors
    S43 – 4 ft Stub, Category 3, Raw-Ended
    T43 – 4 ft Stub, Category 3, Female RJ21 Connector
```

Example: MRB05M03T01S43
5-Pair Mini-Rocker Tailed Terminal Block, Non-Fire Retardant, 4 ft Stub, Category 3, Raw-Ended