

4/5/8-Pair IDC Distribution Terminal Block with Tail



Model MRB04M02T03F63 MRB04M03T03R15 MRB05M03T01S43
MRB08M02T03F63 MRB08M03T03T43

| NAME | ORDER NUMBER |
|---|----------------|
| 4-Pair IDC Distribution Terminal c/w 6ft Male RJ21 Connectorized Tail | MRB04M02T03F63 |
| 4-Pair IDC Distribution Terminal c/w Dual 15" RJ14 Connectorized Tails | MRB04M03T03R15 |
| 5-Pair IDC Distribution Terminal c/w 4ft Stub Unterminated | MRB05M03T01S43 |
| 8-Pair IDC Distribution Terminal c/w 6ft Male RJ21 Connectorized Tail | MRB08M02T03F63 |
| 8-Pair IDC Distribution Terminal c/w 4ft Female RJ21 Connectorized Tail | MRB08M03T03T43 |

The 4/5/8-Pair IDC Distribution Terminal Blocks with tail provides a dependable, long-term means of discrete connections for small pair counts. The “quiet front” design eliminates incidental shorts and the High Viscosity Compound (HVC) encapsulation blocks moisture and eliminates corrosion, resulting in trouble-free service.

When using a small pair count drop in a ready access configuration, the IDC Distribution Terminal Blocks provide quick pair-at-a-time connections without requiring the use of tools. The IDCs stay latched when connections are made, ensuring wire retention and pullout resistance during jumper wire tracing.

The 4/5/8-Pair IDC Blocks can be utilized for indoor and outdoor applications such as aerial, pedestal, wall mount and marina installations



BENEFITS

- High Viscosity Compound (HVC) environmental encapsulation eliminates corrosion, enabling IDCs to function in high-humidity environments
- Insulation Displacement Connectors - IDC create a water tight, tool-less connection
- "Quiet Front" design and easy test access eliminate the need for disconnection during circuit testing

SPECIFICATIONS

| | | |
|------------------------|--------|-----------------------|
| DIMENSIONS (H X W X D) | 5-Pair | 3.5 x 1.0 x 1.0 " |
| | | 88.9 x 25.4 x 25.4 mm |

SPECIFICATIONS

| | |
|------------|---|
| INTERFACE | IDCs will accommodate most wire designs with conductor sizes between 26 AWG - 22 AWG (0.4mm - 0.63mm) |
| COMPLIANCE | Telcordia TR-NWT-001195, TR-TSY-000975, TR-NWT-000937, CAT5 Rating, UL Listed |

Ordering Information

EASY STEPS:


- 1

Select Pair Count
- 2

Select Material
- 3

Indicate Type
- 4

Select Configuration

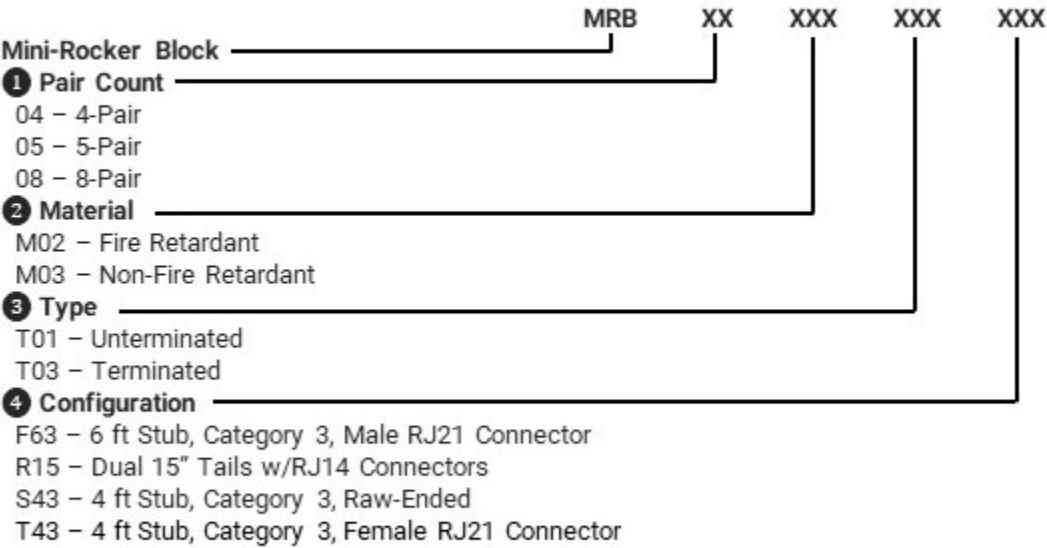

Example: MRB05M03T01S43

5-Pair Mini-Rocker Tailed Terminal Block, Non-Fire Retardant, 4 ft Stub, Category 3, Raw-Ended