

# 10/25-Pair IDC Terminal Block F-Series

Model CMRF10-X-XX-2-XX-XX CMRF25-X-XX-2-XX-XX



## NAME

**10-Pair IDC Inline Terminal Block with tail**

**25-Pair IDC Inline Terminal Block with Tail**

## ORDER NUMBER

**CMRF10-X-XX-2-XX-XX**

**CMRF25-X-XX-2-XX-XX**

The 10/25-Pair IDC Block tail provides a dependable, long-term means of discrete connections. The “quiet front” design eliminates incidental shorts and the High Viscosity Compound (HVC) encapsulation blocks moisture and eliminates corrosion, resulting in trouble-free service.

When using a small pair count drop in a ready access configuration, the 10/25-Pair IDC Block provides quick pair-at-a-time connections without requiring the use of tools. The IDCs latching mechanism ensures wire retention and pullout resistance during jumper wire tracing.

The 10/25-Pair IDC Block can be utilized for indoor and outdoor applications such as aerial, pedestal, wall mount and marina installations.



## BENEFITS

- High Viscosity Compound (HVC) environmental encapsulation eliminates corrosion, enabling IDCs to function in high-humidity environments
- Insulation Displacement Connectors - IDC create a water tight, tool-less connection
- "Quiet Front" design and easy test access eliminate the need for disconnection during circuit testing

## SPECIFICATIONS

| DIMENSIONS (L X W X D) |         |                         |
|------------------------|---------|-------------------------|
|                        | 10-Pair | 9.5 x 2.25 x 0.63 "     |
|                        |         | 241.3 x 57.1 x 15.87 mm |
|                        | 25-Pair | 20 x 2.25 x 0.63 "      |
|                        |         | 508 x 57.1 x 15.87 mm   |

## INTERFACE

IDCs will accommodate wire designs with conductor sizes between 26 AWG - 22 AWG (0.4mm - 0.63mm)

## SPECIFICATIONS


### COMPLIANCE

Telcordia TR-NWT-001195, TR-TSY-000975, TR-NWT-000937, CAT5 Rating, UL Listed

### Ordering Information

#### EASY STEPS:

- 1) Select Pair Count
- 2) Select Cable Category
- 3) Select Stub Length
- 4) Select Jacket Type
- 5) Select Shielding/Filling
- 6) Select Stub Termination

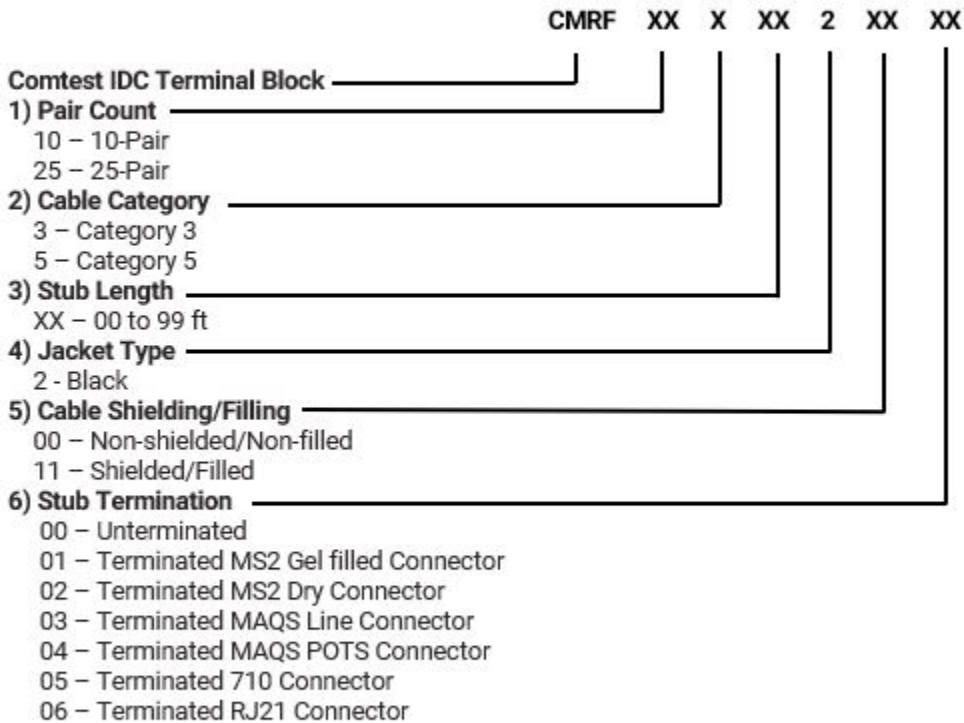

\* Shielding - Coated Corrugated Aluminum (non-bonded)

#### Example: CMRF1030621100

10-Pair IDC Terminal Block, Category 3, 6ft Tailed stub, Black, shielded/filled, unterminated