

# 10/25-Pair IDC Terminal Block F-Series

Model CMRF10-X-XX-2-XX-XX CMRF25-X-XX-2-XX-XX



NAME	ORDER NUMBER
10-Pair IDC Inline Terminal Block with tail	CMRF10-X-XX-2-XX-XX
25-Pair IDC Inline Terminal Block with Tail	CMRF25-X-XX-2-XX-XX

The 10/25-Pair IDC Block tail provides a dependable, long-term means of discrete connections. The “quiet front” design eliminates incidental shorts and the High Viscosity Compound (HVC) encapsulation blocks moisture and eliminates corrosion, resulting in trouble-free service.

When using a small pair count drop in a ready access configuration, the 10/25-Pair IDC Block provides quick pair-at-a-time connections without requiring the use of tools. The IDCs latching mechanism ensures wire retention and pullout resistance during jumper wire tracing.

The 10/25-Pair IDC Block can be utilized for indoor and outdoor applications such as aerial, pedestal, wall mount and marina installations.



## BENEFITS

- High Viscosity Compound (HVC) environmental encapsulation eliminates corrosion, enabling IDCs to function in high-humidity environments
- Insulation Displacement Connectors - IDC create a water tight, tool-less connection
- "Quiet Front" design and easy test access eliminate the need for disconnection during circuit testing

## SPECIFICATIONS

DIMENSIONS (L X W X D)	10-Pair	9.5 x 2.25 x 0.63 "
		241.3 x 57.1 x 15.87 mm
	25-Pair	20 x 2.25 x 0.63 "
		508 x 57.1 x 15.87 mm
INTERFACE	IDCs will accommodate wire designs with conductor sizes between 26 AWG - 22 AWG (0.4mm - 0.63mm)	


SPECIFICATIONS

COMPLIANCE Telcordia TR-NWT-001195, TR-TSY-000975, TR-NWT-000937, CAT5 Rating, UL Listed

Ordering Information

EASY STEPS:

- 1) Select Pair Count
- 2) Select Cable Category
- 3) Select Stub Length
- 4) Select Jacket Type
- 5) Select Shielding/Filling
- 6) Select Stub Termination

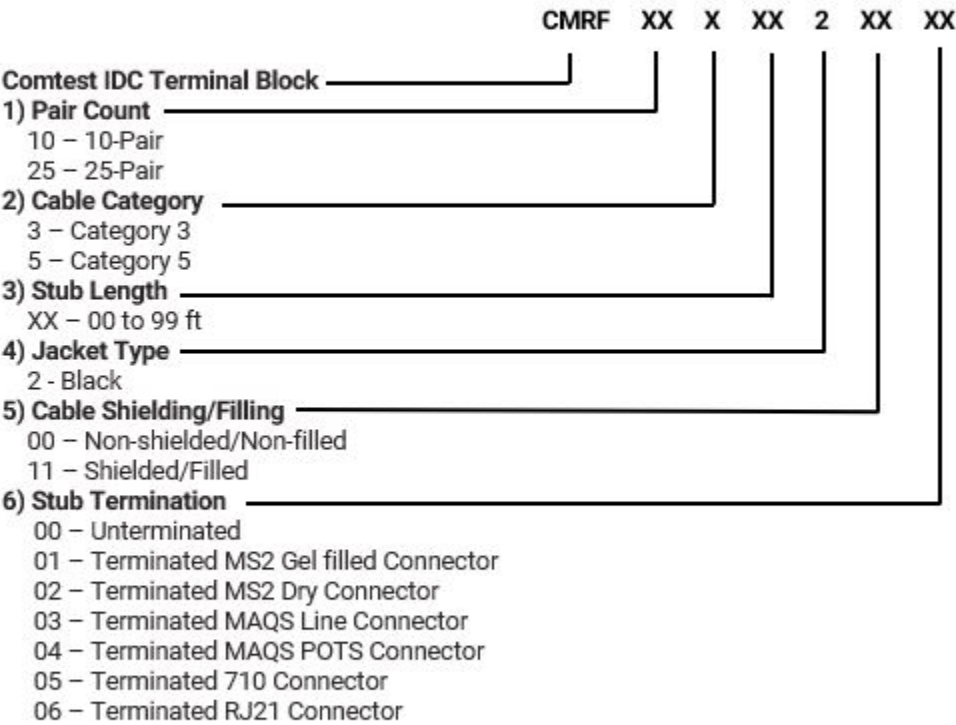

\* Shielding - Coated Corrugated Aluminum (non-bonded)

Example: CMRF1030621100  
10-Pair IDC Terminal Block, Category 3, 6ft Tailed stub, Black, shielded/filled, unterminated