



Features

- Multi-stage protection
- Balanced GDT
- Self-resetting sneak current protection
- Overcurrent and overvoltage protection
- Fast response to transients
- UL Listed per UL 497 (File: E53117)
- High current handling
- Switch-Grade Fail-Short

C-2470 Series 5-Pin Surge Protector

The C-2470 Series 5-Pin Protector is a new generation of telecommunications protector designed for protection of sensitive high-speed network data circuits. The Protector integrates four advanced technologies: an advanced balanced GDT, precision matched Metal Oxide Varistors (MOVs), a switch-grade Fail-Short mechanism, and a transient blocking device that protects the circuit by rapidly switching to a blocking state. These technologies are combined to provide robust overvoltage and fast, resettable sneak-current protection with extremely low surge let-through. Additionally, the C-2470 Series has very low loss characteristics making it the ultimate choice for protection of sensitive, high speed communication lines.

Characteristics

Test Methods per IEEE C62.31, UL 497, CSA C22.2, Telcordia GR 1361 and applicable sections of Telcordia GR 974.

DC Breakdown ¹	300-400 V
AC Breakdown ¹	300-400 V
Impulse Breakdown.....	60 Hz..... 600 V
..... 100 V/μs..... 650 V	
..... 1000 V/μs..... > 1 GΩ	
Insulation Resistance	100 Vdc..... < 1 dB over frequency range ²
Insertion Loss	100 MHz..... < 10 dB over frequency range ²
Return Loss	100 MHz..... 1 MHz..... 12 pF typical
Capacitance Line to Line.....	1 MHz..... 23 pF typical
Capacitance Line to Ground	1 MHz..... 12 ohms typical
Line Resistance (Line In - Line Out).....	< 14 V typical ³
V _{reset}52 V, 260 mA..... < 10 ms ⁵
Impulse Reset ⁴	135 V, 200 mA..... < 10 ms ⁵
..... 150 V, 200 mA..... < 150 ms ⁵	
Impulse Life Characteristics.....	100 A, 10/1000 μs > 3000 operations ⁶
(Per Side, Simultaneously)	300 A, 10/1000 μs > 1000 operations ⁶
..... 500 A, 10/1000 μs > 1000 operations ⁷	
..... 2,000 A, 10/250 μs > 100 operations ⁶	
..... 5,000 A, 20/100 μs > 10 operations ⁶	
..... 20,000 A, 8/20 μs > 10 operations ⁷	
AC Life Characteristics.....	0.5 A rms continuous > 30 seconds
..... 1 A rms, 1 second, 600 ft. cable > 60 operations	
..... 1 A rms, 1 second, 1 mile cable..... > 60 operations	
..... 10 A rms, 1 second..... > 20 operations	
..... 200 A rms, 11 cycles..... 1 operation ⁸	
..... 120 A rms, 0.1 second 1 operation	
Life Test Criteria	
Insulation Resistance Throughout the Life Test.....	100 megohms
Life Test Failures	0.0 %
Failures During Environmental Cycling w/surges.....	0.0 %
Fail-Short (Vented or Non-vented Gas Tube)	> 30 Arms, simultaneously
Storage and Operating Temperature.....	-55 to +85 °C

Notes:

¹ Line to Line voltage is approximately 1.8 times the stated Line to Ground breakdown voltage.

² See insertion and return loss charts on page 2.

³ Designers should note that deliberate DC bias such as POTS (Plain Old Telephone Service), sealing current or remote powering can hold the device in a blocking state after a fault has passed. The sneak-current protector can be reset by momentarily disrupting the loop current or providing a low voltage condition on the line below the module's specified V_{reset} value. This can be accomplished, for example, with line monitoring or other line polling diagnostics in the system.

⁴ Network applied.

⁵ Surpasses Telcordia GR 974.

⁶ Exceeds Telcordia GR 1361.

⁷ RUS PE-80.

⁸ Protector may short to ground.

Applications

- Telecommunications
- Data communications
- High-speed network compatible, i.e.
ADSL2+, VDSL2 and beyond

C-2470 Series 5-Pin Surge Protector

How to Order

Model Number Designator **C-2470 - 4 x(x) - x - xx - x(x)**

Housing Color/Circuit Type
 1 = Black/Standard
 3 = Red/Special
 6 = Blue/Standard
 7 = Violet
 9 = Orange/Standard Service (Non-Bridgelifter)
 10 = Yellow/Standard


Pin Plating
 G = Gold-plated
 T = Tin-plated (GND pin is tin-plated on all models)

Protector Type
 Blank = Multi-Stage Protector
 BC = Balanced Capacitance

Special Options
 S = Sealed Case
 ST = Sealed Case and Test Points
 T = Test Points

* For use on DSL systems that require balanced capacitance of ≤ 1 pF.

Product Dimensions

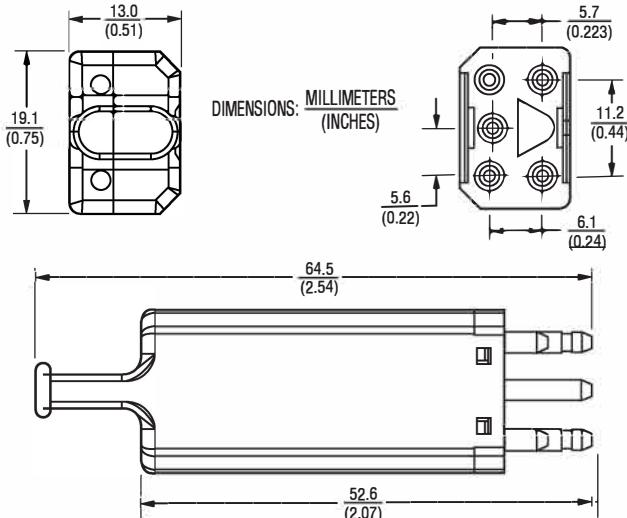

Loss Characteristics for 5-Pin Protector Groups with Current Limiting Devices

