

## Features

- Front-facing configuration—easy access to protector modules, jumper field and test field
- Industry-standard design accepts all standard 303-type protector modules and testing equipment
- Integral fanning strip helps maintain neat and orderly wiring

## Model C(G)-303 100-Pair Connector

The CNI C(G)-303 Connector is intended for applications where lower pair density and full front-facing accessibility are required. The connector is used in central offices where there is ample frame space or to expand existing installations using C(G)-303 connectors. This 483 mm high (19 inch) connector is a 100-pair connector for use on central office main distributing frames, Private Automatic Branch Exchange (PABX) carrier and other special service applications.

The C(G)-303 connector may be used on central office mainframes and other frames with 8 inch (203 mm) between verticals. The connector accepts the full line of industry-standard 303-type, 5-pin protector modules including hybrid, solid-state and gas tube modules.

### Specifications

#### Plastic Materials

Main Body ..... Polycarbonate, ivory, UL 94V-0

#### Metal Parts

Mounting Hardware ..... Steel, zinc-plated

Current-Carrying Components ..... Copper or copper alloys, tin-plated

#### Cable Stub

Termination ..... Wire-wrap, field-installed

#### Cross-Connect (Jumper) Connections

Termination ..... Wire-wrap

Contact Resistance ..... < 2 milliohms

Dielectric Strength ..... > 1500 VDC and >1000 VAC @ 50-60 Hz for two minutes

Insulation Resistance ..... > 30 megohms @ 1000 VDC

Environmental Conditions ..... Operating environment with temperature ranging from 0 °C (+32 °F) to +50 °C (+122 °F) up to 95% R.H.

#### Temperature Characteristics

High Temperature ..... +60 °C (+140 °F) without deformation

#### Frame Vertical Capacities

Height 2.13 m (7.0 ft.) ..... 300 pairs

Height 2.44 m (8.0 ft.) ..... 400 pairs

Height 2.74 m (9.0 ft.) ..... 400 pairs

Height 3.51 m (11.5 ft.) ..... 600 pairs

Height 4.27 m (14.0 ft.) ..... 800 pairs

### Packaging Specifications for Stubless Models


Dimensions (H x W x D) ..... 150 x 500 x 200 cm (6 x 19.7 x 8 in.)

Weight ..... 2.5 kg (5.5 lb.)

Standard Package ..... 1

# Model C(G)-303 100-Pair Connector

## Product Dimensions

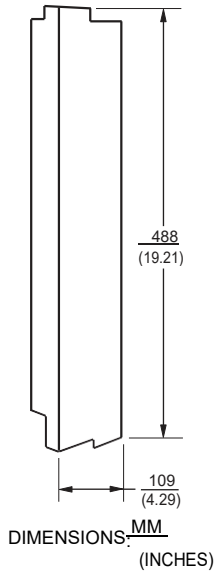

## How to Order

Product Code	Part Number	Description
<b>Stubless</b>		
303-0000	<b>A0313099</b>	C-303 Connector, 100 pair, tin, stubless
303-0B000	<b>303-0B000</b>	CG-303 Connector, 100 pair, gold, stubless
<b>Bonded Cable, Tin with Stub</b>		
303-0023	<b>A0344033</b>	C-303 Connector, 100 pair, tin, 22 AWG, 30 ' stub
303-0025	<b>A0344035</b>	C-303 Connector, 100 pair, tin, 22 AWG, 50 ' stub
303-0028	<b>A0344036</b>	C-303 Connector, 100 pair, tin, 22 AWG, 80 ' stub
303-0020	<b>A0344037</b>	C-303 Connector, 100 pair, tin, 22 AWG, 100 ' stub
303-0043	<b>A0344027</b>	C-303 Connector, 100 pair, tin, 24 AWG, 30 ' stub
303-0045	<b>A0344029</b>	C-303 Connector, 100 pair, tin, 24 AWG, 50 ' stub
303-0048	<b>A0344030</b>	C-303 Connector, 100 pair, tin, 24 AWG, 80 ' stub
303-0040	<b>A0344031</b>	C-303 Connector, 100 pair, tin, 24 AWG, 100 ' stub
<b>Bonded Cable, Gold with Stub</b>		
303-0B403	<b>303-0B403</b>	CG-303 Connector, 100 pair, gold, 22 AWG, 30 ' stub
303-0B405	<b>303-0B405</b>	CG-303 Connector, 100 pair, gold, 22 AWG, 50 ' stub
303-0B408	<b>303-0B408</b>	CG-303 Connector, 100 pair, gold, 22 AWG, 80 ' stub
303-0B410	<b>303-0B410</b>	CG-303 Connector, 100 pair, gold, 22 AWG, 100 ' stub
303-0B303	<b>303-0B303</b>	CG-303 Connector, 100 pair, gold, 24 AWG, 30 ' stub
303-0B305	<b>303-0B305</b>	CG-303 Connector, 100 pair, gold, 24 AWG, 50 ' stub
303-0B308	<b>303-0B308</b>	CG-303 Connector, 100 pair, gold, 24 AWG, 80 ' stub
303-0B310	<b>303-0B310</b>	CG-303 Connector, 100 pair, gold, 24 AWG, 100 ' stub

Note: Order by Part Number.

REV. 05/01/2020

Comtest Networks Inc. (CNI)  
[comtestnetworks.com](http://comtestnetworks.com)

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth at [comtestnetworks.com/<TBD>/disclaimer.pdf](http://comtestnetworks.com/<TBD>/disclaimer.pdf).