


Features

- 213 mm (8.4 in.) connector height with front-facing jumper and test fields
- 4 inch intervertical spacing when installed on 8 inch verticals - provides ample space for placing cross-connect (jumper) wires
- Slide access protector module field with self-latching design
- Front and rear snap-through fanning strips
-  Listed

MPC® Mainframe Connector (QCM486) 100-Pair Connector

The mainframe connector is a miniature, main distributing frame (MDF), high-density connector for use on the vertical side of main distributing frames or on protector frames.

The MPC® Mainframe Connector terminates 100 outside plant pairs and provides voltage or voltage and current protection for the central office personnel, wiring and equipment. It consists of a heavy gauge metal frame with an integral mounting bracket, flame-retardant plastic bases for the protector module, cross-connect (jumper) and test fields. The cross-connect and test fields are easily accessed from the front of the block to minimize installation and maintenance time.

The MPC® Mainframe Connector may be ordered with either insulation displacement connectors (IDCs) or wire-wrap terminations on the cross-connect (jumper) side. It is also available with 22 or 24 AWG (0.64 or 0.50 mm) stub cable in various lengths or stubless if desired.

The protector modules are installed on the side of the MPC® Mainframe Connector. Bourns® QMP-series solid-state and gas tube protector modules are available for the MPC® Mainframe Connector. The protector modules may be ordered separately or pre-installed in the connector's detent position ready for cutover with full protection assured.

A full range of installation and test accessories are available to support the MPC® Mainframe Connector.

Specifications

Plastic Materials

Main Body Polycarbonate, beige, UL 94V-0

Metal Parts

Mounting Hardware Steel, hard bright tin-plated

Current-Carrying Components High conductive copper or copper alloys, hard bright tin-plated

Outside Plant Cable Stub

Description 22 or 24 AWG (0.64 or 0.5 mm),
100-pair solid PVC or flame-retardant polyolefin or dual-layer solid CMR;
UL-listed and FT4 CSA certified polyolefin/PVC insulation, Alplast sheath
(Alvyn type)

Termination Wire-wrap

Grounding Through main chassis to main distribution frame

Resistance <1 milliohm change over product life

Cross-Connect (Jumper) Connections

Termination Wire-wrap or insulation displacement connections

Contact Resistance < 1 milliohm change over product life

Dielectric Strength 1000 VDC

Insulation Resistance > 500 megohms

Environmental Conditions

For indoor use, 10 to 95 % RH

Temperature Characteristics

Operating +32 ° to +122 °F (0 ° to 50 °C)

Frame Vertical Capacities

Height 2.13 m (7.0 ft.) 600 pairs


Height 2.45 m (8.0 ft.) 900 pairs

Height 2.76 m (9.0 ft.) 1100 pairs

Height 3.51 m (11.5 ft.) 1400 pairs

MPC® Mainframe Connector (QCM486) 100-Pair Connector

Product Dimensions

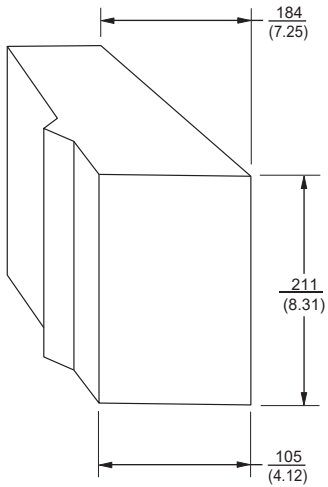

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Packaging Specifications

| Std. Pack | Stub Length m (ft.) | Size (H x W x D) mm (in.) | Weight kg (lb.) |
|-----------------|------------------------|--------------------------------|--------------------|
| Stubless | | | |
| 4 | 0 | 410 x 410 x 310 (16 x 16 x 12) | 36.4 (80) |
| Stubbed | | | |
| 1 | 9.1 (30) | 690 x 840 x 150 (27 x 33 x 6) | 14.6 (32) |
| 1 | 15.2 (50) | 690 x 840 x 150 (27 x 33 x 6) | 18.6 (41) |
| 1 | 30.5 (100) | 810 x 940 x 200 (32 x 37 x 8) | 28.6 (63) |

Note: Additional stub length options may be available. Please contact your nearest Bourns Representative for assistance.

How To Order

Model

Cross-connect Field
A1 = Insulation Displacement Connections
B1 = Wire-wrap

Stub
00 = Stubless
22 = 22 AWG
24 = 24 AWG

Stub Entry
0 = Stubless
B = Bottom
T = Top

Stub Length
000 = Stubless
030 = 9.1 m (30 ft.)
050 = 15.2 m (50 ft.)
100 = 30.5 m (100 ft.)

Protector Modules
000 = No Protector Modules
11A5 = (100) QMP11A5 Solid-state 300 V
12A4P = (100) QMP12A4P Solid-state 300 V with PTC Sneak Current Protection
6A5 = (100) QMP6A5 Gas 400 V
6A4 = (100) QMP6A4 Gas 400 V, 350 mA Heat Coils

Examples: QCM486A100000011A5 = IDC, stubless with 11A5 protector modules (100 QMP11A5).
QCM486B124B0506A4 = Wire-wrap, 24 AWG, bottom stub, 50 foot, with 6A4 protector modules (100 QMP6A4).

Comtest Networks Inc. (CNI)
comtestnetworks.com

Specifications are subject to change without notice.
Users should verify actual device performance in their specific applications.
The products described herein and this document are subject to specific legal disclaimers as set forth at comtestnetworks.com/<TBD>/disclaimer.pdf.

MPC® Mainframe Connector (QCM486) 100-Pair Connector

How to Order MPC® Connector Accessories

| Product Code | Part Number | Description |
|--------------|-------------|--|
| QTH38B | A0276558 | Termination Tool, IDC – used to terminate and trim wires in insulation displacement cross-connect terminals |
| QGF4A | A0260364 | Module Guard – red plastic locking wedge to lock and flag protector modules in the MPC protector field, use 1 per module |
| NS19478L1 | A0207604 | Test Field Guard – red plastic guard to flag and prevent accidental contact with test points in the MPC test field, use 1 per pair |
| QGF22A | QGF22A | Jumper Field Guard, IDC – red plastic guard to flag and prevent accidental contact with jumper field terminals, use 2 per pair |
| 545-1137 | A0321718 | Jumper Field Guard, Wire-wrap – red plastic guard to flag and prevent accidental contact with jumper field terminals, use 2 per pair |
| QSBC1A | A0273233 | Designation Strip – self-adhesive numbering strip to facilitate location of pair numbers on the jumper field |
| | | |
| | | |
| | | |
| | | |

Note: Order by Part Number.

REV. 05/02/2020

Comtest Networks Inc. (CNI)
comtestnetworks.com

*Specifications are subject to change without notice.
Users should verify actual device performance in their specific applications.
The products described herein and this document are subject to specific legal disclaimers as set forth at comtestnetworks.com/<TBD>/disclaimer.pdf.*